

User Manual



Hunting Camera

SG560X/SG562-C/SG2060 Series/SG562-D


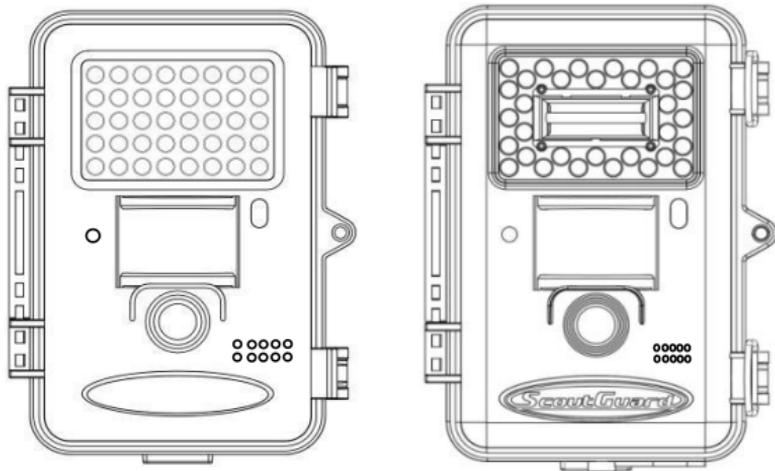



Table of Contents

| | |
|---|----|
| 1. Getting Started..... | 2 |
| 2. Camera Operation..... | 4 |
| 2.1 Batteries/ Power Supply..... | 4 |
| 2.2 SD Card Information..... | 4 |
| 2.3 Camera Mode..... | 5 |
| 2.4 Trigger Mode..... | 6 |
| 3. Camera Setup Settings and Display..... | 7 |
| 3.1 Settings Interface & Display..... | 7 |
| 3.2 Manual Image / Video Capturing..... | 8 |
| 3.3 Manage Images and/or Videos..... | 8 |
| 3.4 Camera Setup Operation..... | 9 |
| APPENDIX..... | 15 |
| Mounting the Camera..... | 15 |
| Technical Specifications..... | 17 |
| Parts List..... | 18 |

1. Getting Started

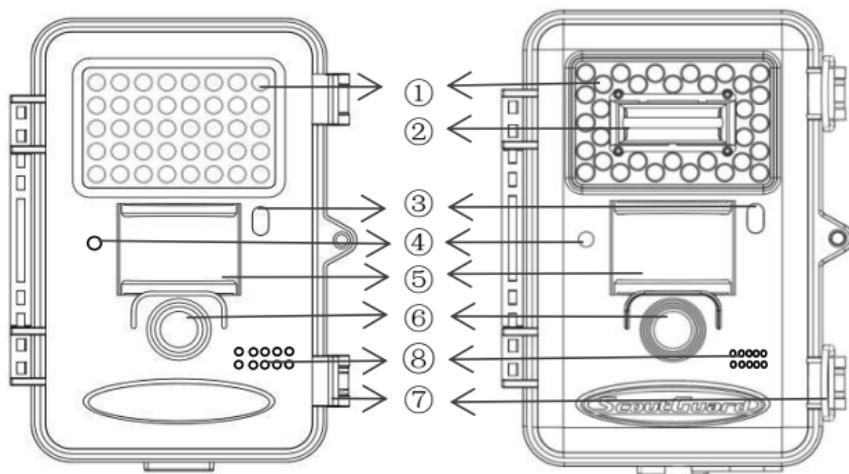

| | | | |
|---|------------|---|--|
| ① | IR LED | ② | Flash: Available for SG560X/ SG2060-X/SG562-D |
| ③ | Indication | ④ | Mic |
| ⑤ | PIR | ⑥ | Lens |
| ⑦ | Lock | ⑧ | Speaker: Available for SG2060Series/ SG562-D |

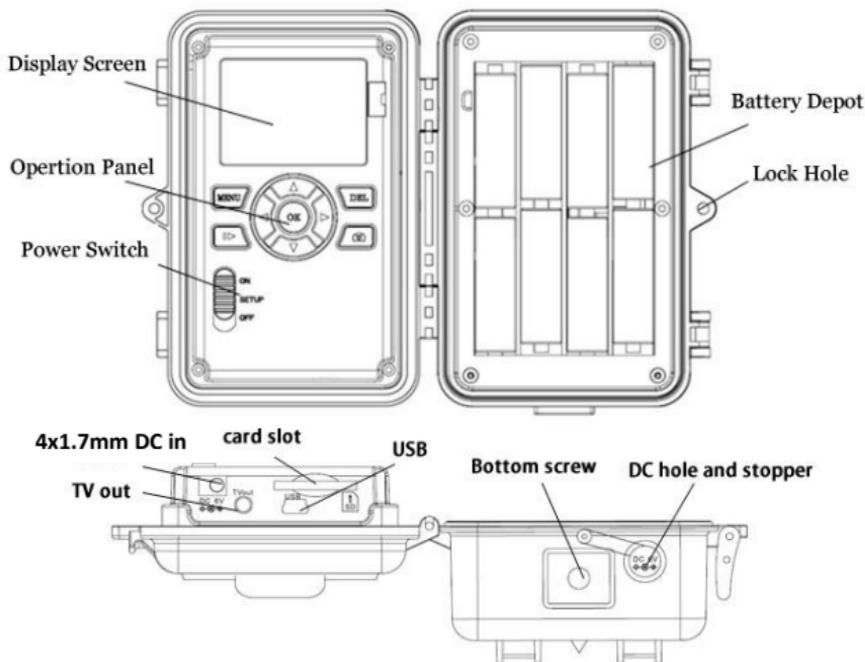

| Model | Product Features |
|--------------|---|
| SG560X-18mHD | Motion Sharp Camera, 100ft detection range. |
| SG562-C | White LED Flash Camera, color pictures and videos at night. Motion Sharp Technology |
| SG562-D | Combination White LED/Xenon Flash, color pictures and videos at night |
| SG2060-X | Motion Sharp 25MP Camera, Dual Focus |
| SG2060-U | Ultra High Quality 25MP, Dual Focus |
| SG2060-K | Ultra High Quality 25MP, Extra long detection range |

2.Camera Operation

2.1 Batteries/ Power Supply

The camera is powered by four or eight AA batteries - High-density, high-performance, rechargeable Alkaline or NiMH batteries are recommended. When the batteries are low, the camera will beep twice and automatically shut down.

A DC 6-Volt, 2 Amp external power supply adapter can also be used to power the camera .

2.2 SD Card Information

Insert the SD card into the camera before turning on the camera

This camera supports up to a 32GB capacity SD card and has no built-in internal memory. The camera will not function without the SD card properly inserted into the camera.

Make sure the SD card is unlocked before inserting it into the camera

The camera will operate properly with a locked SD card inserted, but the card will not be able to store captured images or videos taken by the camera.

Do not remove the SD card while the camera is on

Removing the SD card while the camera is on risks damaging the internal components of the camera.

If you experience any problems with an inserted SD card

Try reformatting the SD card using the camera's main settings option.

2.3 Camera Mode

ON Mode

The camera will take pictures or video when motion is detected and/or at specific time intervals, according to the programmed settings. After switching the camera to the ON position, the motion indicator LED (red) will blink for about 10 seconds and then turn off. This delay time allows you to adjust the camera position if needed, before the camera becomes active.

SETUP Mode

Customize the camera settings, or playback pictures and videos the camera has taken on the LCD display.

OFF Mode

Turn off the camera. The camera will still consume a small amount of battery power while in OFF mode - it is recommended to remove the batteries if the camera will not be

used for a long period of time.

2.4 Trigger Mode

PIR Trigger / PIR Sensitivity: The default setting is on. If PIR triggering is on,

the camera is only active when motion is detected. If PIR sensitivity is set to OFF, the camera stops responding to motion.

PIR Trigger / PIR Sensitivity: The default setting is OFF which means timer triggering is disabled. When the timer triggering interval is set to a non-zero value, the camera starts to work at a preset interval. Users need to set the PIR sensitivity to OFF if they want the camera to work only at preset intervals.

PIR and Timer Triggering: For both PIR triggering and Timer triggering, users need to set PIR sensitivity to low, normal, or high according to the external environment, and set the Timer interval to a desired non-zero value. The camera will capture pictures or videos in a preset time interval even if there is no motion detected; the camera will also capture pictures and videos if motion is detected.

3. Camera Setup Settings and Display

3.1 Settings Interface & Display

To update the camera settings, move the the power switch to SETUP position.

Menu: Enter the program menu in preview mode

▶ Exchange between playback and preview mode


DEL: Delete a photo or video

📷 : Capture a photo or record a video manually

▼▲▶◀: Navigate parameter settings

OK: Save parameter settings and play videos

When the camera is in SETUP mode, the screen will activate and display the following:

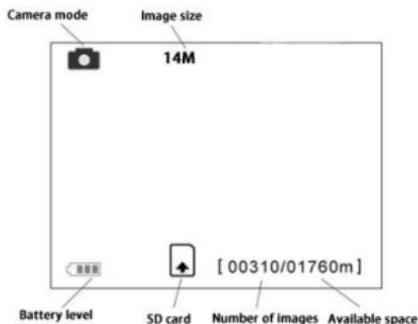

3.2 Manual Image / Video Capturing

Place the camera in SETUP mode and press  to manually capture photos or record video. Press  again to stop capturing video.

3.3 Manage Images and/or Videos

Place the camera in TEST/SETUP mode and press  button to view images or videos. The latest image or video will be shown on the LCD screen.

To view:

Press  or  to view the previous or next image /video,press OK to play a video

To delete:

Press DEL to delete images or videos in the playback state.If you are in preview state,press  to enter into playback state first.

3.4 Camera Setup Operation

To view the camera setting menu, slide the power switch to setup position. Use ▼ or ▲ buttons to select sub-menu; use ◀ or ▶ to select different options. Press ok to save the settings. After changing EACH setting in Setup menu, press ok or the camera will retain the previous settings. Depending on the different modes, not all menu options may be available on your specific camera.

| Menu Options | Description |
|--------------|---|
| Camera Mode | There are three camera modes: Photo: to take photos. Video: to capture video. Pic+Video: to take a picture with a video clip. This mode disables the photo burst function. Default: Photo |
| Set Clock | To set camera's clock. The clock format is YY/MM/DD hour:minute:second. Press ▼ ▲ to change the value. Press ▶ ◀ to select date or time field. |
| Photo Size | Choose the image size, e.g. 18MP, 12MP, 5MP or 25MP, 14MP, 8MP. Default: 25MP (SG2060 series) Others: 18MP |
| Photo Burst | Choose the number of continuous photos taken after each trigger. |

| | |
|-----------------|---|
| | <p>When the Camera Mode is set to Pic+Video, the Photo Burst option is automatically disabled, resulting in only one picture captured with the video. When the Camera Mode is set to Photo, the Photo burst option will operate normally as specified.</p> <p>Default:1</p> |
| Object Distance | <p>The camera supports two focus captures: Far: the camera focuses at 0.8m to 1.5m/3.3m (SG2060 series) Near: the camera focuses at 0.4m to 0.8m (SG2060 series)</p> <p>Default: Far</p> <p>Available for SG560X/SG2060 series</p> |
| Video Size | <p>Choose the video size: 1920x1080,1280x720 or 640x480</p> <p>Default:1920x1080</p> |
| Video Length | <p>Choose the duration of video recordings. This parameter is only active and adjustable when the device is in video mode and ON.Press ▼▲ to decrease or increase the value. Its value extends from 5 to 120 seconds or 180 seconds (for SG2060 Series).</p> <p>Default: 10Sec</p> |
| Time Lapse | <p>If time lapse is on, the camera can capture</p> |

| | |
|--|---|
| | <p>images or videos at a preset time interval regardless of whether motion is detected. The default setting is off, which means the timer function is disabled. Changing this parameter to a non-zero value turns on Time Lapse mode, and the camera will take photos at the given time interval. NOTE: If the PIR Trigger is set to off, then Time Lapse can't be set to off.</p> <p>Default: OFF</p> |
| <p>PIR Trigger / PIR Sensitivity</p> | <p>This parameter defines the sensitivity of the PIR</p> <p>High: indicates that the camera is more responsive to motion. It is recommended to use high sensitivity in a room or environment with little interference.</p> <p>Normal: The default value is normal.</p> <p>Low: means the camera is not very responsive to motion. It is recommended to use this setting in outdoor environments or environments with a lot of interference like hot wind, smoke, near a window, etc.</p> <p>OFF: the camera is not triggered by motion to capture pictures or videos.</p> <p>NOTE: The sensitivity of the PIR is strongly</p> |

| | |
|--------------|---|
| | <p>related to the temperature. A higher temperature leads to a lower sensitivity. Therefore, it is suggested to use higher sensitivities for high temperature environment</p> <p>Default: Normal</p> |
| Illumination | <p>Choose the range of the flash. The optional parameters are ShortRange and LongRange. Available for SG562-D</p> <p>Default: LongRange</p> |
| PIR Interval | <p>This setting indicates how long the PIR sensor will be disabled after it is triggered. During this time the PIR sensor will not react to any detected motion or scheduled timer functions. The PIR Interval can be set between zero seconds to a maximum of 1 hour. Press LEFT or RIGHT to decrease or increase the desired PIR Interval time.</p> <p>Default: 5Sec</p> |
| Work Day | <p>Choose the days of the week the camera works on. Not available for SG2060 Series.</p> <p>Default: All</p> |
| Working Hour | <p>This setting controls when the camera is active each day. If activated, the camera will NOT take pictures or videos outside of the specified working hour, regardless of any other setup</p> |

| | |
|-----------------|---|
| | <p>option settings. The values are set to military time which ranges from 00:00 to 23:59.</p> <p>Default: OFF</p> |
| Camera Position | <p>You can set an A-Z indicator for each of your cameras in order to distinguish which photos are from a specific camera.</p> <p>Default: OFF</p> |
| Time Stamp | <p>It defines whether the date and time should be stamped on the picture or not. Available for SG560X</p> <p>Default: On</p> |
| Language | <p>Choose the language for the menu.</p> |
| Beep Sound | <p>Enable or disable the beep sound. Available for SG2060 series</p> <p>Default: On</p> |
| Game Call | <p>Allows the camera to play an audio file at a preset time each day. The audio file must be saved in the directory of \DCIM\100BMCIM\ with a name of AUDIxxxx(from 0000 to 9999).WAV after formatting the SD card and setting the game call to on. Available for SG2060 series</p> <p>Default: On</p> |
| Recycle | <p>In hunting mode, when the SD card is full, the first images or videos will be replaced by new</p> |

| | |
|------------------|--|
| Storage | <p>pictures or videos so you don't need to retrieve your memory card manually. But in SETUP mode, the SD card can't recycle storage.</p> <p>Default: On</p> |
| Format SD | <p>Deletes all images and videos in the SD card. Make sure you have made a backup of important data before selecting this option.</p> |
| Default Settings | <p>Restore all camera settings to default values.</p> |
| Version | <p>Contains version information.</p> |

APPENDIX

Mounting the Camera

When mounting a camera to a tree, use either the mounting bracket or the strap provided.

Tips: Try not to mount the camera when the sun is rising or setting.. If mounting to a feeder or in a dusty environment, be sure to clean the camera lens and PIR sensor regularly. Periodically, check the mounting of the camera to make sure it hasn't come loose.

Trouble Shooting

Q1: There is something in front of the camera lens. Is the camera broken?

A: The camera is not broken. What's in front of the lens is an IR-Cut filter. When the camera is powered on, the IR-Cut will reset and cover the lens. When the camera is powered off, the IR-Cut will be at a random place

Q2: The camera controller is not working anymore

A: Most likely, no SD card was inserted in the camera when it was turned on. Please make sure a working SD card has been inserted in the camera before it is turned on.

Q3: Why did the display screen suddenly turn black?

A: To reduce power consumption, the camera will shut down

automatically after 3 minutes if nothing is done. Please turn the power on again if you want to continue.


Glossary

- 1.PIR: Passive Infrared motion sensor
- 2.FOV: Field of view

PIR Detection Zone

This camera has a new PIR, which is patented. The new PIR's detection range can reach 100ft. in good environments. The following picture compares the detection zone between the normal PIR and the new PIR.

The PIR detection angle (α) is smaller than the field of view (FOV) angle (β). The advantage of this design is to reduce empty picture rate and capture most, if not all, motions.

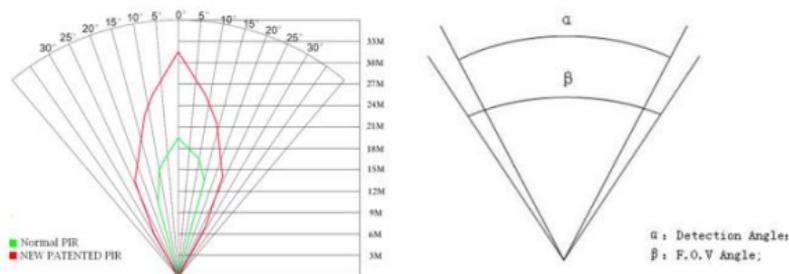

Technical Specifications

| Items | SG562-D | SG562-C | SG560X | SG2060Series |
|----------------------------|---------------------------|---------------------|--------|--------------|
| Image Sensor | 5MP | | | 14MP |
| Lens | F/NO=2.4 FOV=55° | F/NO=2.4 FOV=57° | | |
| Detection Range | 100ft | | | |
| Illumination | 100ft | 100ft | 100ft | 100ft |
| Display Screen | 2"LCD | 2"LCD | 2"LCD | 2"LCD |
| Picture Resolution | 5MP/12MP/18MP | | | 8/14/25MP |
| Video Resolution | 1080P/720P/VGA | | | |
| Video Length | 5-120s | | | 5-180s |
| Weight | 0.25kg (without battery) | | | |
| Operation/Storage Tem. | -20° ~+60° /-30° ~+70° | | | |
| Power Supply | 8AA or 4AA | | | |
| Memory Card | 8MB-32GB | | | |
| Sound Recording | Available | | | |
| Mounting | Rope / Belt / Python lock | | | |
| Dimensions | 140x80x50 mm | | | |
| Operation Humidity | 5 % - 90 % | | | |
| Security Authentication | FCC, CE, RoHS | | | |

Boly Inc is constantly involved in development, engineering, and production – Accordingly, we reserve the right to modify, at any time, any product, product specification and data without notice to improve reliability, function, design or otherwise. The information contained herein is based on tests and data that Boly Inc. believes to be reliable, but the accuracy or completeness is not guaranteed. No warranty of any kind is made with respect to any of the above representations. No reproduction, copy or use thereof may be made without the express written consent of Boly Inc. and Boly Holding Co. Ltd

Parts List

| Part Name | Quantity |
|------------------|----------|
| Digital Camera | one |
| USB Cable | one |
| Mounting Bracket | one |
| Belt | one |
| User's Manual | one |
| Warranty Card | one |

For more details about our product or user manual, please visit our website at: <http://www.bolymedia.com/index>

