

User Manual

BG490 Series

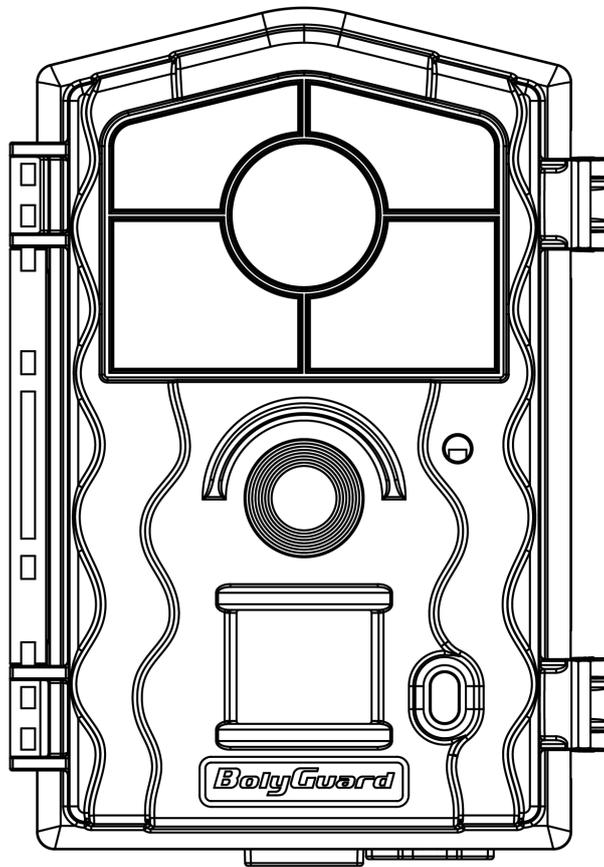


Table of Contents

1. Getting Started.....	1
1.1 General Description.....	1
1.2 Product View.....	2
2. Camera Operations.....	4
2.1 Power Supply.....	4
2.2 SD Card Information.....	4
2.3 Camera Modes.....	5
2.4 Manual Image / Video Capturing.....	6
2.5 Manage Images and Videos.....	6
2.6 Trigger Modes.....	7
3. Camera Display & Settings.....	8
3.1 Basic Key Function & Display.....	8
3.2 Camera Setup Options.....	9
4. PIR Detection Zone.....	12
5. Technical Specifications.....	13
6. Parts List.....	14
<i>WARRANTY CARD</i>.....	15

1. Getting Started

1.1 General Description

BG490, is a digital infrared surveillance camera monitored by a highly sensitive Passive Infrared (PIR) motion sensor that can be triggered by any human or animal movements. After being triggered, the camera then automatically captures pictures or video clips.

This camera is powered by 4 or 8 AA batteries. It can sustain in stand-by mode alone for up to 6 months on 8 AA batteries, is designed for outdoor use, and resistant against rain and snow.

Has the following interfaces: a 2" color LCD display screen, operation panel, USB connector, SD card slot and an external DC power connector.

Difference:

BG490-K30M


56pcs of 940nm Black IR LED (invisible)

BG490-I30M

56pcs of 850nm IR LED (visible)

1.2 Product View

Front View

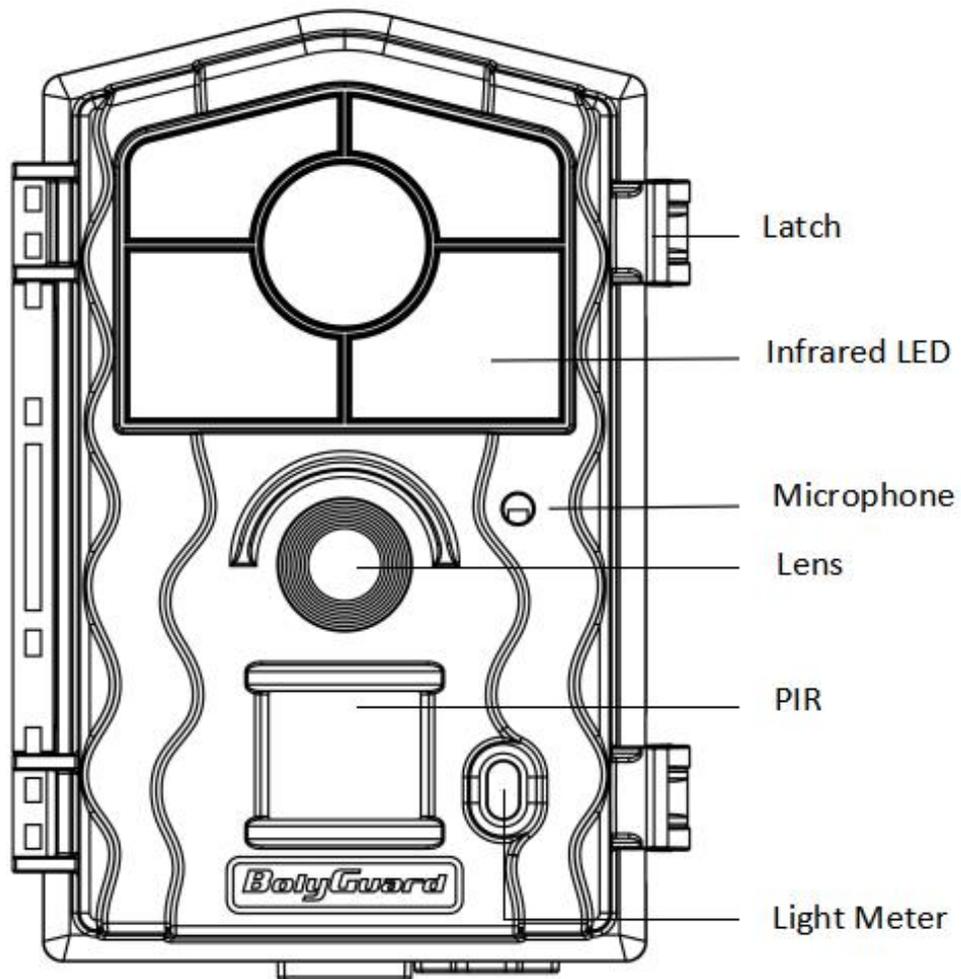

2. Camera Operations

2.1 Power Supply

4 or 8 AA batteries high-density, high-performance rechargeable or non-rechargeable alkaline batteries are recommended. You can also use NiMH batteries as well, but each battery should be above 1.5V.

A DC 6-Volt, 2 Amp external power supply adapter can also be used to power the camera (not included).

NOTE: *when using only 4 AA batteries, insert them using the 3 top positions along with the first bottom position (the left position) or the last 4 bottom positions (the right 4 positions).*

2.2 SD Card Information

To take full advantage of the latest technologies, we recommend Class 10 SD cards or better, which have fast transfer speeds and long durability for extensive shooting in the most extreme outdoor conditions. Some SD cards are Secure Digital High Capacity (SDHC) PRO cards, which only work with SDHC compatible devices. Please check that your product is compatible with SDHC cards.

- **Insert the SD card into the camera before turning on the camera**

This camera supports up to a 32GB capacity SD card, and has no built-in internal memory. The camera will not function without the SD card properly inserted into the camera.

- **Make sure the SD card is unlocked before inserting it into the camera**
- **If you experience any problems with an inserted SD card, try reformatting the SD card through the camera's main settings option.**

2.3 Camera Modes

The different modes are according to the position of the power switch. The three basic operation modes as below:

OFF Mode

Switching the camera to the OFF position turns the camera off. The camera will still consume a small amount of power while in “OFF” mode. It is recommended to remove the batteries if the camera will not be used for a long period of time.

ON Mode

Switching the camera to ON position turns the camera on. When movement occurs within the monitored region, the camera will take pictures or record videos automatically according to the previous programmed settings. After switching

the camera to the ON position, the motion indication LED (red) will blink for about 10 seconds. This time interval is for you to position the camera for automatic surveillance operation.

SETUP Mode

Switching the camera to the SETUP position allows you customize your camera settings or play back pictures and videos the camera has taken on the LCD display. The camera will automatically shut down after a few minutes of no operation.

2.4 Manual Image / Video Capturing

Place the camera in SETUP Mode and press **SHOT** to manually capture photos or record video. Press **SHOT** again to stop video capture.

2.5 Manage Images and Videos

Place the camera in SETUP Mode and press **Playback/Preview** to view images or videos. The latest image or video will be shown on the LCD screen.

To view:

Press ▲ or ▼ to view the previous or next image or video.

To delete:

Find the image or video you want to delete. Press the Delete key. Press OK to delete, or press MENU

again if you decide not to delete the image or video.

Note: the DEL button works only in Playback state.

2.6 Trigger Modes

There are 3 trigger modes for the cameras.

PIR trigger: PIR trigger is constantly working when the camera is on. The camera takes photos/videos only when motion is detected.

Time lapse: The time lapse default setting is OFF by default. If the timer trigger interval is manually set to a non-zero value, the cameras start to work at a preset interval.

PIR & Timer trigger: If you want both PIR trigger and time lapse, you need to set PIR trigger to “ normal, high or low ” sensitivities according to the external environments. Be sure to also set the time lapse to a desired non-zero value. The cameras will capture pictures or videos in preset time intervals even if there is no motion detected, and will capture pictures and videos when motion is detected.

**Time Lapse and PIR Trigger cannot be set to off at the same time.*

Additional PIR settings to note:

- **PIR Interval**

This setting indicates how long the PIR sensor will be disabled after each camera triggering. During this time the PIR sensor will not react to any detected motion.


3. Camera Display & Settings

3.1 Basic Key Function & Display

To update the camera settings, place the power switch to the ON position.

- **MENU**: Enter the program menu in preview mode
- **▲▼◀▶**: Parameter settings as described in the user's manual
- **OK**: Save parameter settings and play videos
- **I▶**: Exchange between playback and preview
- **DEL**: Delete an image
- **📷**: Capture a photo or record a video manually

When the camera is on, the screen will activate and display the following:

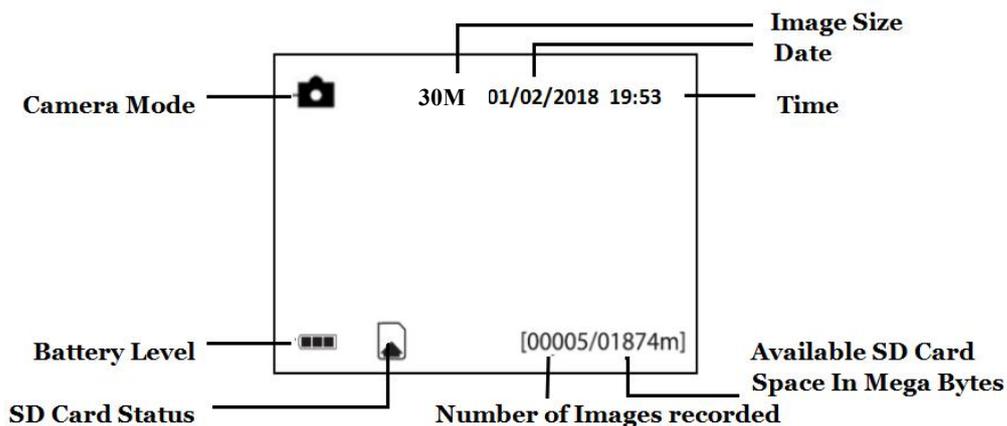

3.2 Camera Setup Options

To view the camera settings menu, you need to enter the SETUP Mode, and press MENU.

Use ▲ or ▼ keys to select the sub-menu.

Use ► keys to select the different options.

Press “OK” to save the settings.

After changing EACH setting in SETUP Mode, you must press OK or the camera will retain the previous setting.


Menu Option	Description
Language	Choose desired language: English, Spanish, French Default: English
Camera Mode	Choose between capturing images, videos or both at the same time: Photo, Video, Pic+Video. Default: Photo
Set Clock	Two time systems: 12H or 24H. Setting the date and time of the camera. You can change the date and time of the device through this setting when necessary (battery replacement, day light savings). The date format is month/day/year . The time format is hour: minute: second . Default: 24H

Photo Size	Choose the image size. 14/20/30MP Default: 30 MP
Photo Burst	Choose the number of photos taken after the camera is triggered: 1 Photo, 2 Photos, or 3 Photos. Default: 1 Photo
Video Size	Choose the video size: 1920x1080,1280x720. Default: 1920x1080
Video Length	Choose the duration of the video recording: Valid values extend from 10 to 180 seconds. Press ► to increase the video time by 10 seconds. Default: 10 seconds
Time Lapse	Time lapse means the camera can capture images or videos at a preset time interval regardless of whether motions are detected. The default parameter is off, which means the timer function is disabled. Changing this parameter to a non-zero value turns on the Time Lapse mode, and camera will take photos at the given time interval. Please note that if the PIR Trigger is set to off, then Time Lapse can't be set to off. Default: OFF
PIR Trigger	This setting is for the sensitivity of the PIR sensor. There are four sensitivity


	<p>parameters: High, Normal, Low, OFF. It is recommended to use HIGH sensitivity in areas with little environmental interference and for warmer, humid climates. Use LOW sensitivity for areas that have a lot of interference. The sensitivity of the PIR is affected by temperature. Higher temperatures lead to a lower sensitivity.</p> <p>Please note that if Time Lapse is set to off, then PIR Trigger can't be set to off.</p> <p>Default: Normal</p>
PIR Interval	<p>This interval shows how long the PIR will be disabled after each triggering in the ON mode.</p> <p>During this time, the PIR sensor will not react to any detected motion or scheduled timer functions. The PIR Interval can be set between zero seconds to a maximum of 1 hour.</p> <p>Press ► to adjust the desired PIR Interval time.</p> <p>Default: 5 seconds</p>
Format SD	<p>All information on the SD card will be deleted. Make sure you backup important data on the SD card before using this mode.</p>
Default Set	<p>Restores all settings back to default values.</p>
Version	<p>Version information.</p>

4. PIR Detection Zone

The PIR's detection range can reach 70ft in an open environment. The following picture shows this camera's PIR detection range compared to standard PIR detection range.

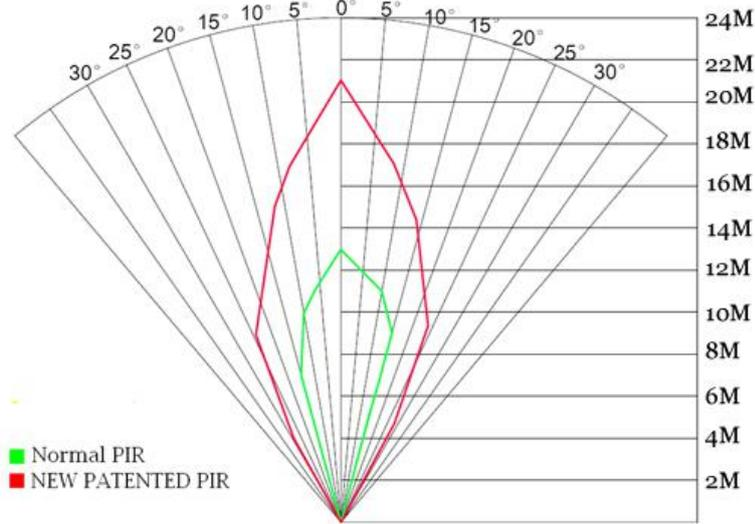

The PIR detection angle (α) is smaller than the field of view angle (β). The advantage of this design is to reduce empty picture rates and capture most, if not all, motion detected.

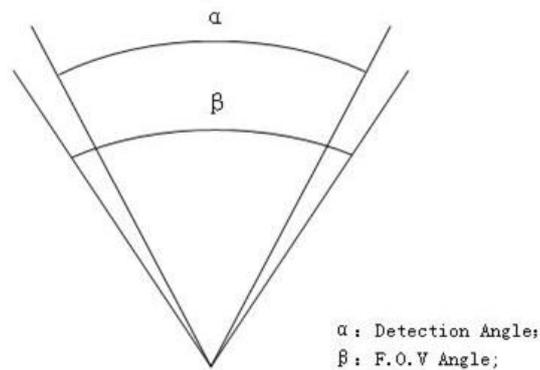

5. Technical Specifications

Image Sensor	14MP CMOS Sensor
Lens	F/NO=2.4 Field of View=57°
LED Type	BG490-K30M:940nm BG490-I30M:850nm
LED Number	56pcs
Detection range	100ft.
Illumination Distance	100ft.
Display Screen on Remote Control	2" LCD
Memory Card	Up to 32 GB
Image Resolution	14/20/30MP
Video Resolution	1920x1080,1280x720
PIR Trigger	High, Normal, Low, Off
Trigger Time	<0.7 Sec
PIR Interval	0Sec – 60 Min.
Photo Burst	1–3
Video Length	10–180 Secs
Power Supply	4 or 8×AA
Stand-by Current	< 0.3 mA (<7mAh/Day)
Audio Recording	Yes
Operating Temperature	-20°C to + 60°C
Relative Humidity	5% to 90%
Security Authentication	FCC, CE, RoHS

6. Parts List

Part Name	Quantity
Camera	1
USB Cable	1
Belt	1
User Manual	1
Mounting Bracket	1

Version 1.0

WARRANTY CARD

Customer Name: _____

Contact Address: _____

Date of Purchase: _____

Contact Tel: _____

Model No.: _____

Series No.: _____

Retailer: _____

The camera manufacturer provides 12 months warranty for this product against manufacturing defects or malfunctions. If your camera fails to function under normal use within 1 year, the camera manufacturer will repair or replace the camera for free of charge. Improper use of the camera resulting in damage is not covered by this warranty. The camera manufacturer can provide extra service for your camera after the warranty expiration, but the customer have to be responsible for extra charges on parts, labor and shipping costs therefore brought.

Please contact your reseller for warranty service